



भारतीय सूचना प्रौद्योगिकी संस्थान गुवाहाटी  
INDIAN INSTITUTE OF INFORMATION TECHNOLOGY GUWAHATI  
Bongora, Kamrup ( R ), Assam, India, PIN 781015

Phone: +91-361-2801091  
email: [doa@iiitg.ac.in](mailto:doa@iiitg.ac.in)

**Notice Inviting Quotation**

NIQNo.IIITG/Works/2024-25/224 dated: 29.07.2025

To,

**Interested Vendors/Contractors**

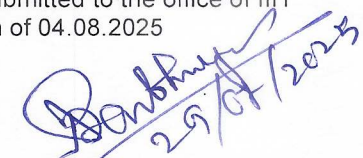
The undersigned invites sealed quotations from the vendors/contractors for onward submission along with requisite documents for the work "Making of earthen drain in between football field and SAC & Town Hall, along road of tennis and basketball court and partially brick covered drain at IIIT Guwahati campus" in the form of BOQ (Bill of Quantities) enclosed herewith.

Sl No.	Particulars	Details of Works
1	Name of Works	"Making of earthen drain in between football field and SAC & Town Hall, along road of tennis and basketball court and partially brick covered drain at IIIT Guwahati campus"
2	Completion period	30 days from the date of issue of work order
3	Last Date & Time of Submission of BOQ	04.08.2025 up to 3.00 pm
4	Date & Time of opening	04.07.2025 at 3.30 pm
5	Scope of work	As detailed in the BOQ
6	SD money	2.5% will be deducted which will be released after 3 months from the date of completion.

You are requested to submit your rates in the given BOQ format (with your working rates in the rate's column) with the proof of following documents.

**TERMS & CONDITIONS:**

1. The bidder must have a valid Govt./Semi Govt. contracting registration with working experience of civil works of value not less than Rs. 1,50,000/- (supported with completion certificate and work order)
2. The Bidder should have valid GSTN, PAN and own Bank Account and must be a business entity of the state of Assam.
3. All other general Terms & conditions as followed in IIITG for works will also apply in this NIQ.
4. The rates Quoted by the bidder shall be inclusive of GST, other statutory taxes/cess/royalties as may be applicable.
5. The bidder quoting the lowest amount will be awarded the work. However, if the Institute discover that the price quoted by a Bidder/Company/Firm/Agency is abnormally low or unjustified, the bid may not be considered.
6. Hard copies of Bid along with all other required documents must be submitted to the office of IIIT Guwahati, Bongora, Kamrup(R), Assam-781015, India on or before 3 pm of 04.08.2025

  
Dean Administration

## BOQ

**Name of work: Making of earthen drain in between football field and SAC & Town Hall , along road of tennis and basket ball court and partially brick covered drain at IIIT Guwahati campus.**

SI No	Description of item of work	Unit	Qty	Rate	Amount
	For Drain				
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. : All kinds of soil.	cum	349.75		
2	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in: 6.1.1 Cement mortar 1:4 (1 cement : 4 coarse sand)	cum	4.60		
3	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :4.1.6 1:3:6 (1 Cement : 3 coarse sand (zone-III) derived from natural sources : 6 graded stone aggregate 40 mm nominal size derived from natural sources)	cum	2.20		
4	12 mm cement plaster finished with a floating coat of neat cement of mix : 1:4 (1 cement: 4 fine sand	sqm	60.00		
5	Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level : 1:1.5:3 (1 cement : 1.5 coarse sand (zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size de rived from natural sources	cum	2.40		
6	Centering and shuttering including strutting, propping etc. and removal of form for : Suspended floors, roofs, landings, balconies and access platform	sqm	24.24		
7	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level.: Thermo-Mechanically Treated bars of grade Fe-500D or more.	kg	357.86		
		<b>Total</b>		<b>Rs.</b>	
		<b>Rounded off</b>		<b>Rs.</b>	